

SPREADER



MS966 UNDER TAILGATE

Heavy Duty Versatile Reliable

- Economical way to Utilize Existing Dump Body for Maximum Returns Winter & Summer
- Standard Mildsteel Powdercoat
- Capable of Spreading Free Flowing Material from 4' to 40'
- Convenient Chain Hoist Lifting Slots Placed at Balance Points for Easy and Safe Mounting and Dismounting
- All Welds are 100% Continuously Welded to Prevent Corrosion Pockets
- 96" Wide; 6" Auger
- 1/4" End plates
- 7 ga Trough and Lid
- 3" x 2" Tube for Rear Reinforcement
- Fully Opening Top Lid with Easy Access



Direct Drive Spreader Shown

- Fully Opening Bottom Trough for Assisting with Complete Clean-out of Unit, and also Allowing Full Access for Servicing Unit with Center Lift Handle
- Anti-Flow Plate to Restrict Material from Free Flowing When Unit is Stopped
- Captive Latching System for Lid and Trough
- Heavy Duty #60 Roller Chain and Sprocket Drive

NEW "Z" Latch



New "Z" Latch with Safety Retainer!
Easy One Man Latching Without the Use of Tools!




Shown is the Bottom
Trough Return Lip for
additional Support

Monroe Spinner Assembly is Mounted Independently of Bottom Clean-out Door and has the **Exclusive One-Man Mount and Dis-Mount Feature.**

Standard spinner disc is 18" poly. Spinner disc is directly mounted to the hydraulic motor by means of a cast iron spinner hub. Standard spinner motor is a low speed high torque motor. There are six formed flights that are cupped for more even and accurate Spreading.

Spinner is designed to remain perpendicular to ground at all dump box angles.

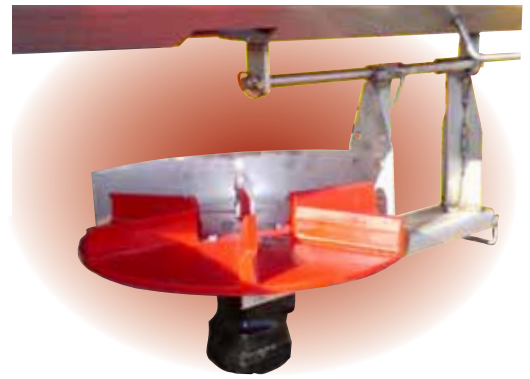

Shown is Optional Gravity Leveled Spinner

Options

- Centerline Chute • Integral Speed Sensor
- Flow Control Valve • Hose Kit
- Spinner Guards • Gravity Leveled Spinner
- 5:1 Gearbox Drive • Direct Drive
- Corrosion-Resistant Stainless Steel

Discharge Options

- Reverse Flighted • One Way Full Left
- Center • Dual Discharge
- Dual Discharge with Extra Spinner

Auger is full 7', 6" in diameter, 4" pitch 3/8" thick flighting, welded to a 2 7/8 OD Schedule 40 pipe. Auger shafts are 1 1/4" and supported by heavy duty 1 1/4" sealed, self aligning, relubeable, 2 bolt flanged bearings.



Shown above, is the full opening top lid and full access trough bottom.

- Overall length. 96"
- Width w/Spinner 24"
- Width w/o Spinner. 18"
- Height w/ Spinner 34"
- Height w/o Spinner 20"
- Trough opening. 11"
- Approximate Weight 530lbs

Heavy Duty
Distributed by:
Versatile
Reliable

Manufactured by:

Snow & Ice Control

A Division of Monroe Truck Equipment, Inc
1051 W. 7th Street, Monroe, WI 53566
800-880-0109
Fax: 608-328-8390
www.monroetruck.com



Shown to the left, the retainer for the center of the top cover.