

# SPREADER



## MS969 UNDER TAILGATE

**Heavy Duty**  
**Versatile**  
**Reliable**

- Economical way to Utilize Existing Dump Body for Maximum Returns Winter & Summer
- Mildsteel Powdercoat
- Capable of Spreading Free Flowing Material from 4' to 40'
- Convenient Chain Hoist Lifting Slots Placed at Balance Points for Easy and Safe Mounting and Dismounting
- All Welds are 100% Continuously Welded to Prevent Corrosion Pockets
- 96" Wide; 9" Auger
- ¼" End plates
- 7ga Trough and Lid
- 5" x 2" Tube for Rear Support
- Captive Latching System for Lid and Trough



*Optional Corrosion-Resistant Stainless Steel shown.*

- Full Opening Top Lid with Easy Access
- Full Opening Bottom Trough for Assisting with Complete Clean-out of Unit, and also Allowing Full Access for Servicing Unit with Center Lift Handle
- Anti-Flow Plate to Restrict Material from Free Flowing When Unit is Stopped
- Direct Drive with Stainless Shaft Coupler
- HD 1½" Four Bolt Flange Bearing

**NEW**

**"Z" Latch**



New "Z" Latch with Safety Retainer!  
Easy One Man Latching Without the Use of Tools!




*Shown is the Bottom Trough Return Lip for additional Support*

Monroe Spinner Assembly is Mounted Independently of Bottom Clean-out Door and has the **Exclusive One-Man Mount and Dis-Mount Feature.**

Standard spinner disc is 18" poly. Spinner disc is directly mounted to the hydraulic motor by means of a cast iron spinner hub. Standard spinner motor is a low speed high torque motor. There are six formed flights that are cupped for more even and accurate Spreading.

Spinner is designed to remain perpendicular to ground at all dump box angles.

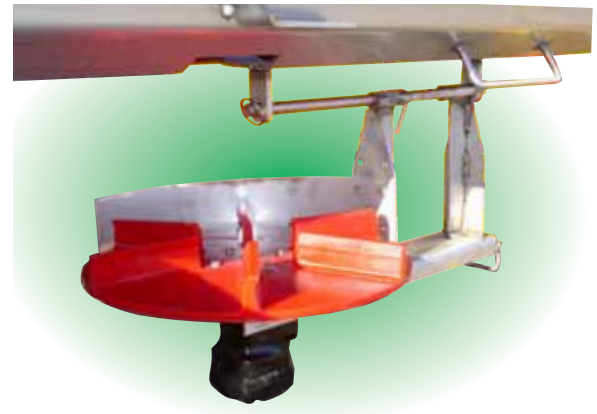

*Shown is Optional Gravity Leveled Spinner*

Auger is full 7', 9" in diameter, 6" pitch  $\frac{3}{8}$ " thick flighting, welded to a 2" OD Schedule 40 pipe. Auger shafts are 1 1/2" and supported by heavy duty 1 1/2" sealed, self aligning, relubeable, 4 bolt flanged bearings. Direct drive motor with 304 stainless shaft coupler.



**Options**

- Centerline Chute • Integral Speed Sensor
- Flow Control Valve • Hose Kit
- Spinner Guards • Gravity Leveled Spinner
- Corrosion-Resistant Stainless Steel

**Discharge Options**

- One Way Full Left • Dual Discharge
- Dual Discharge with Extra Spinner
- Reverse Flighted • Center

Overall length.....	96"
Width w/Spinner .....	22"
Width w/o Spinner .....	19.5"
Height w/ Spinner .....	39"
Height w/o Spinner .....	18.5"
Trough opening.....	12"
Approximate Weight .....	605lbs

Heavy Duty  
Distributed by:  
**Versatile**  
Reliable



*Shown above, is the full opening top lid and full access trough bottom.*

*Shown to the left, the retainer for the center of the top cover.*

Manufactured by:

**Snow & Ice Control**

A Division of Monroe Truck Equipment, Inc  
1051 W. 7th Street, Monroe, WI 53566  
800-880-0109  
Fax: 608-328-8390  
[www.monroetruck.com](http://www.monroetruck.com)