



Monroe RDS-Metro



**Combination Dump Body/Spreader designed for use with all kinds of materials.
A multi-purpose body for the 17,500 - 19,000 pound GVW chassis.**



- Available in 9' and 11' lengths.
- Body is constructed of HSLA steel, 304 stainless steel, or 409 stainless steel.
- 3 cubic yard struck capacity.
- Self-cleaning, semi-circular design.
- One piece sides and headsheet with integral cabshield.
- Built-in integral fenders.
- Front mounted nitrated cylinder with 12" x 12" doghouse.

RDS-Metro Specifications

- 12 gauge, 304 stainless steel formed inner and outer longmembers.
- 24" wide main conveyor.
- Replaceable 10 gauge floor.
- 1½" diameter drive and idler shafts with 6-tooth cast iron sprockets.
- High torque, low speed motor, direct coupled to a 50:1 gearbox.
- 667X pintle chain with ¼" x 1½" cross bars spaced 4½" CC.
- 12 gauge HSLA tailgate sheet.
- Stop, turn, tail and clearance lights.
- Manual release tailgate with full perimeter boxing; horizontal edges sloped outward.
- Pintle plate rear hinge assembly.
- Self-locking screw adjustable feedgate.


Options:

- Stationary ladder assembly
- Top grate screens
- Conveyor chain oiling system
- Rear mounted asphalt patching pan
- Built-in tool box
- Custom acrylic enamel paint to match chassis or custom color request



WARNING! Capacity for the RDS-Metro body was based on salt weighing 2000 lbs. per yard. If materials other than salt are being used in the RDS-Metro, it will increase the gross weight of the vehicle. The total weight of any material hauled in the RDS-Metro body must not exceed the chassis manufacturers recommendations or any state and federal front and rear gross vehicle axle weight ratings. Failure to adhere to these ratings will result in voiding the RDS-Metro warranty.

RDS-Metro Spinner Assembly

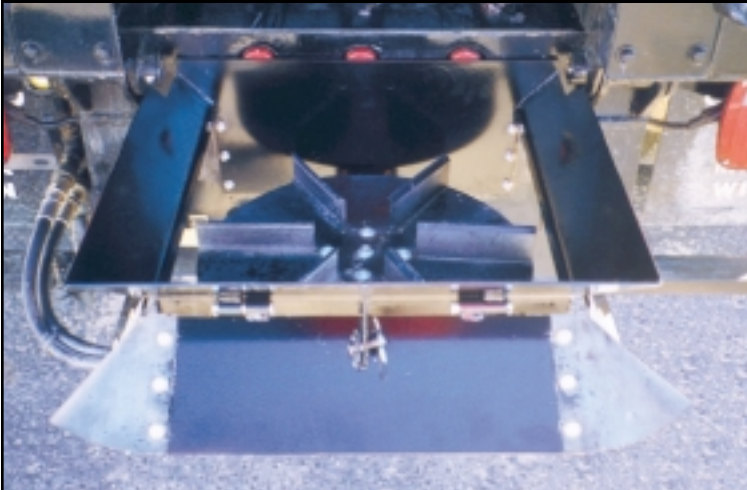

- Quick disconnect spinner assembly with quick disconnect hoses.
- Three overlapping spinner deflectors; rod and clip pin adjustable.
- 18" UHMW spinner disc with replaceable machined hub.
- Hydraulic motor mounted directly below spinner disc.

Manufactured by:
Monroe Snow & Ice Control
1051 W. 7th Street
Monroe, WI 53566
800-880-0109
608-329-8105
608-328-8390 Fax

Distributed by: