



# Snow Buster Poly Trip Edge Reversible Plow

*Designed for a wide range of light duty city or rural plowing*



## **MOLDBOARD**

- Available in 8', 9' and 10' lengths
- Tough durable  $\frac{3}{8}$ " UHMW-UV stabilized polymer
- UV stabilized - prolongs life of polymer
- High impact resistant - lighter than aluminum, stronger than steel
- Abrasion resistant - slippery surface pushes through snow easily
- Resists snow and ice build-up
- Rigid moldboard stacks snow higher

## **CUSTOMIZED MOUNTING KITS**

- Fits most current 3/4 Ton, 4x4 Pick-up, with minimum 8600 GVWR and most current 2WD/4WD, 1 Ton and Super Duty class trucks

*NOTE: Monroe Truck Equipment does not recommend exceeding the GVWR or GAWR rating noted.*

## **OPTIONAL HYDRAULICS**

- Electric-hydraulic power source with cab controls
- Standard plow is shipped without hydraulics

### **Manufactured by:**

**Monroe Snow & Ice Control**


*A Division of Monroe Truck Equipment*

1051 W. 7th Street

Monroe, Wisconsin 53566

800-880-0109 • Fax 608-328-8390 • Website: [www.monroetruck.com](http://www.monroetruck.com)

### **Distributed by:**

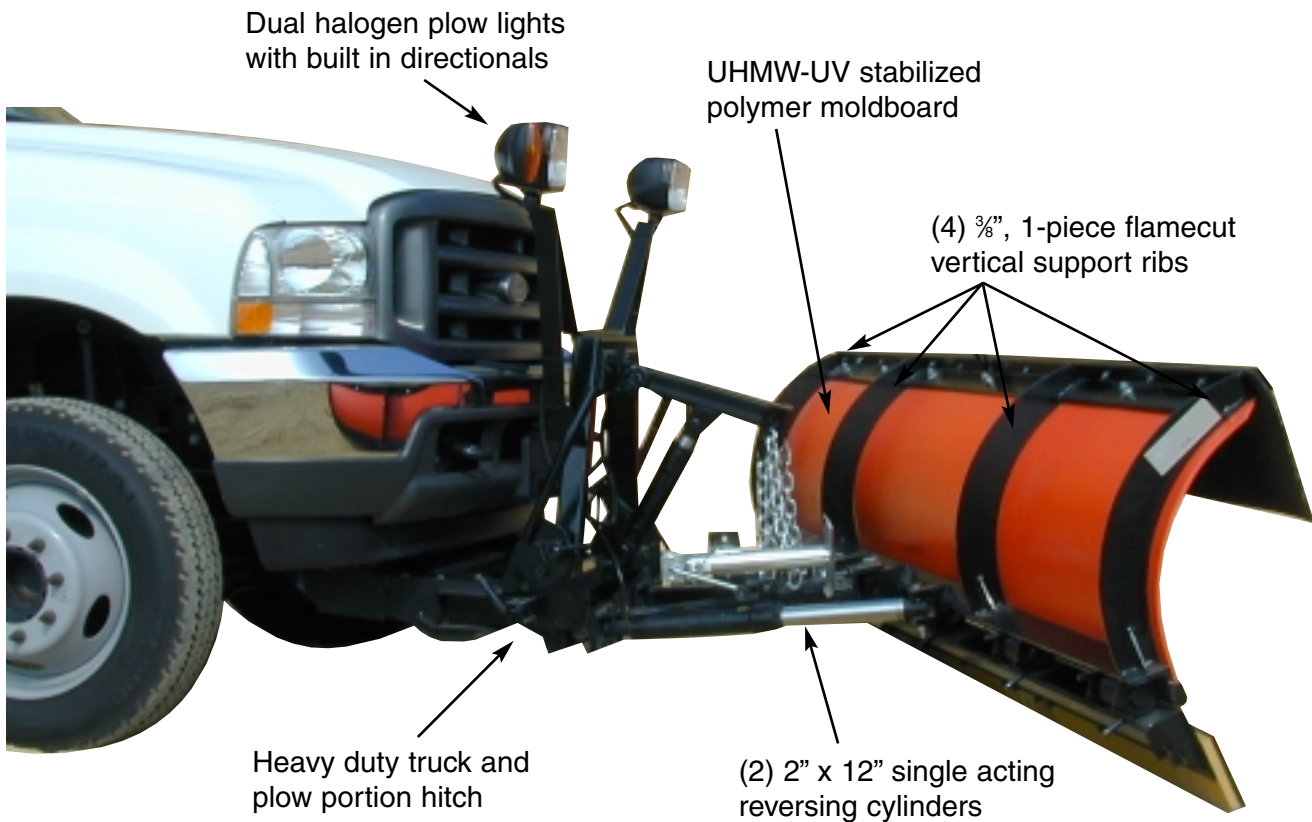

### STANDARD SPECIFICATIONS

- 29" high  $\frac{3}{8}$ " UHMW-UV stabilized polymer moldboard
- $\frac{1}{2}$ " x 8" center-punched reversible cutting edge on 8' & 9' moldboard
- $\frac{5}{8}$ " x 8" center-punched reversible cutting edge on 10' moldboard
- Top angle is 3" x 2" x  $\frac{3}{8}$ " structural angle iron
- Lower angle is 3" x 3" x  $\frac{1}{2}$ " structural angle iron
- Center pivot block with grease zerk & 1" bolt
- 20° plow attach angle to road surface
- 2" x 6" single acting lift cylinder
- Dual  $\frac{3}{8}$ " lift chains



### SAFETY TRIP CUTTING EDGE

- (6)  $\frac{1}{2}$ " Seven coil horizontally mounted torsion springs allow moldboard to remain upright at all times
- Plow can operate at a steady, safe speed.
- Eliminates the starting/stopping and loss of snow load that full moldboard trip plows would.

***Trip Edge Trips Back to Clear Obstacles***